



Matching your
protection
requirements



PP melt blown Filtration material

Why Protechnic ?

Select your unique specifications :

- Weight and thickness
- Roll length
- Breathability
- Filtration

Applications

- FFP1 and FFP2 masks
- Surgical mask
- Sanitary products




Matching your protection requirements

	1 layer	2 layers
Weight (NF EN 12127)	25 gsm	50 gsm
Filtration level Aerosol(DEHS)*	>78%	>97%
Filtration level Aerosol(NaCl)*	>94%	>99%
Air permeability (ISO 9237:1995)	≥310 (l/m ² /s) 200 Pa	≥152 (l/m ² /s) 200 Pa


Note : We are qualified for **EN 149 : 2001 + A1 : 2009** for both DEHS and NaCl methods.

Personal Protective Equipment

2 layers thermoadhesive film

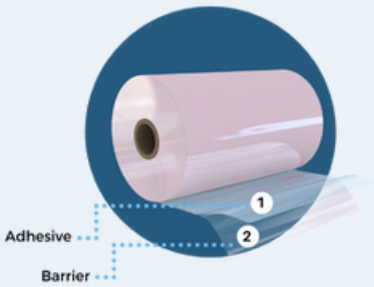

3 layers thermoadhesive film

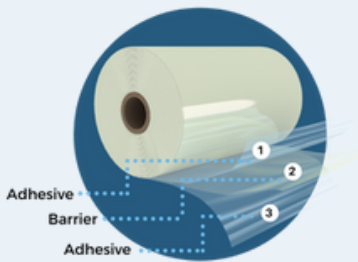


With our multi-layers film you can functionalize your composite and pass hydrostatic head test.

Functions

- Barrier function
- Anti-virus function
- Bonding function

Why Protechnic ?

We also provide you PPE solutions with different functionalities.

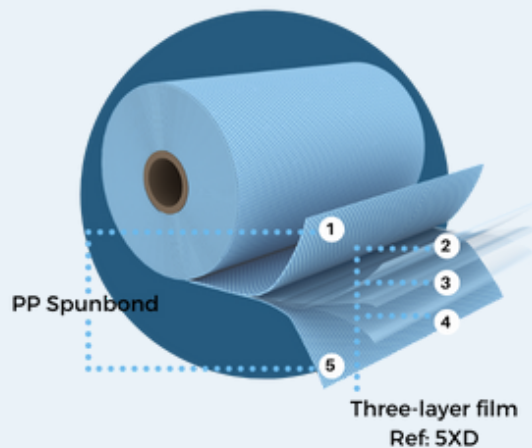

Application

- Medical gowns
- Surgical drapes
- Protective apparels



What we can provide

Efficient protection

Our PP Meltblown has high filtration level with good breathability. Our multi-layers film can block liquid and keep comfort at the same time.

Quality control

We have been focusing on the enhancement of quality control, providing excellent service.

Export to the world

Export sales reach up to 92% of our sales figure in more than 50 countries.

Contact us

commercial@protechnic.fr

Headquarters : 41 Avenue Montaigne 68700 Cernay - France

Tel : +33 (0)3 89 35 60 00

